



DYV 더블 피스톤 회전 실린더 [로크밸브 형]

Double Piston Hydraulic Cylinder with Lock Valve

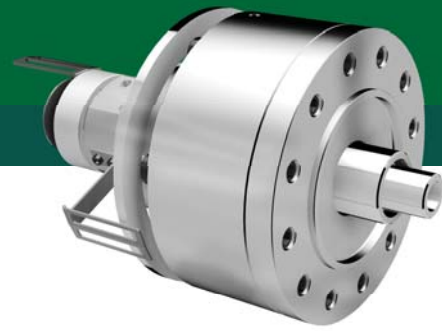

- Operates independently of two pistons
- Compatible with HCWF Chuck
- 두개의 독립된 피스톤 작동
- 더블웨지(HCWF)척과 연동하여 사용

HYDRAULIC CYLINDER

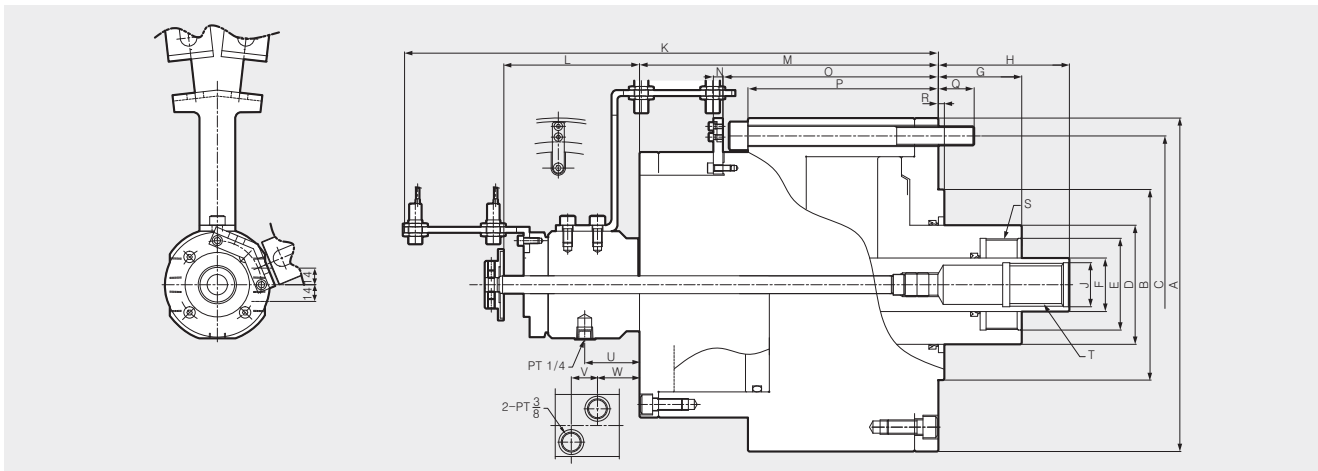

Dimensions / 치수표

	A	B	C	D	E	F	G Max.	G Min.	H Max.	H Min.	J	K	L	M	N	O	P	Q	R	S	T	U	V	W
DYV-21560	280	160	250	100	77	45	70	10	110	50	37	448.3	114	251	8	181	160	30	5	M75x2.0	M36x4.0	46	22	35.3

Specifications / 사양

	PISTON STROKE (mm)	Piston Surface Area 피스톤 단면적		Piston Force 피스톤 주력		Max. Operating Pressure 최대사용유압력 MPa(kgf/cm ²)	Max. rpm 허용최고 회전속도 min ⁻¹ (r.p.m.)
		압축 push cm ² G/H	인축 pull cm ² G/H	압축 push KN(kgf) G/H	인축 pull KN(kgf) G/H		
DYV-21560	60	363 / 254	299 / 238	1724 / 1206	1420 / 1130	5.1(50)	3200