


IAHT 오토 인덱스 척

Auto-Indexing Chuck




SPECIAL CHUCK



- Machine multiple surfaces in a single clamping
- On-the-fly indexing
- Index positions 3 x 120° or 6 x 60°
- Accurate, durable indexing system

- 1회 고정 후 다양한면 가공가능
- 회전 중에도 각도 분할 기능 가능
- 3 x 120° or 6 x 60° 분할가능하고, 높은 분할 정밀도 보장
- 체크 밸브 내장형으로 비상시에도 안전

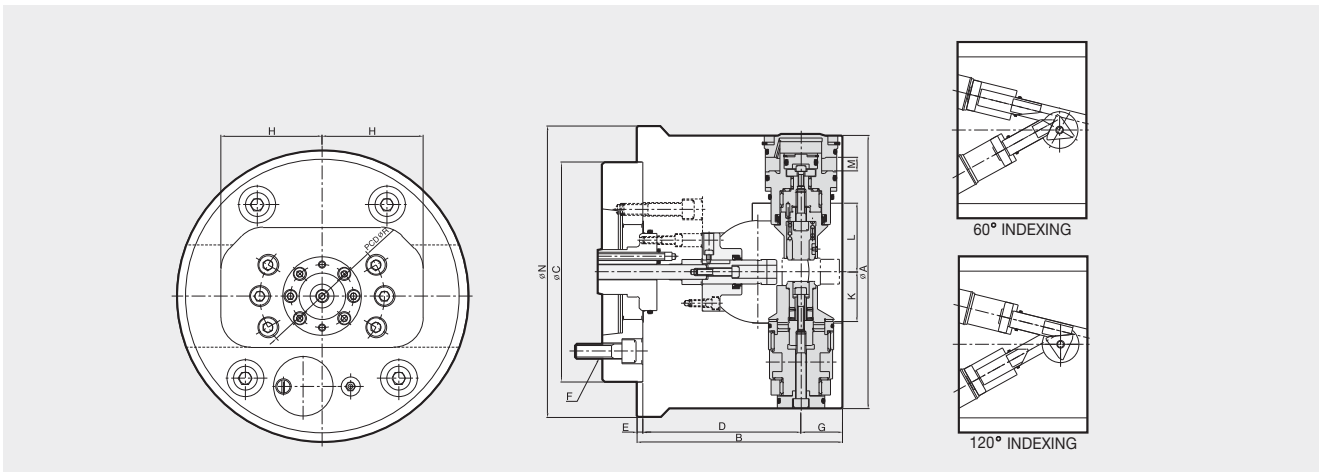

Dimensions / 치수표

	A	B	C(h°)	D	E	F	G	H	K	L	M	N	R
IAHT-230	230	158	130	123	15	M10	35	102	40	58	14.5	245	104.8
IAHT-280	280	193.5	170	143.5	11	M16	50	82.5	56	71	21	295	130
IAHT-300	300	200	170	143.5	11	M16	56.5	82.5	56	65	25	295	130

Specifications / 사양

	Clamp Piston Area (cm ²)	Main Spindle Bore (mm)	Max. Speed (r.p.m.)	Weight (kg)	GD ² (kgf·m ²)
IAHT-230	1270	OVER 45	2400	35	1.3
IAHT-280	2170		2000	65	3.6
IAHT-300	3500		1800	83	4.2

Work Piece

